

VIKING PUMP

LACT PERFORMANCE PRODUCTS

DURABLE & RELIABLE SOLUTIONS

SUMP PUMP

FEATURES & BENEFITS: 475 SERIES

NEMA C-Face Mounting

- Easy installation and small footprint; no drive equipment necessary

Simplified Construction


- Minimal parts and economical for medium duty applications

Internal Pressure Relief Valve

- Prevents over pressurization; protects pump while eliminating requirement for external pressure protection

Self-Priming, Positive Displacement

- Ideal for filtering, circulation, and transfer of liquids in 5 displacements up to 30 GPM

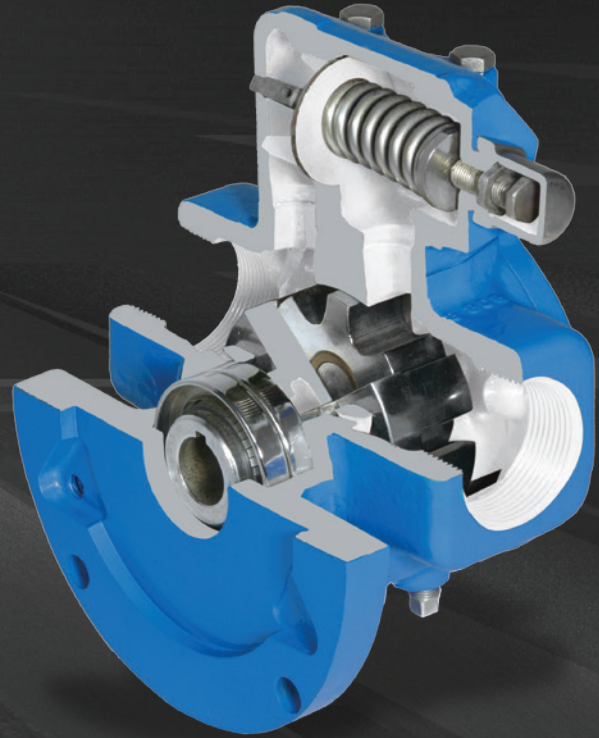

PERFORMANCE:

Model Number	Port Size	Port Type	Nominal Capacity at Maximum Speed	Maximum Speed	Maximum Differential Pressure	Maximum Temperature	Approximate Shipping Weight (Pump Only)
	Inches		GPM	RPM	PSI	°F	Pounds
SG-0550	0.5	NPT	2	1,750	500	225	7
SG-0570	0.5	NPT	2.8	1,750	500	225	7
SG-0510	0.5	NPT	4	1,750	400	225	8
SG-0514	0.75	NPT	5.6	1,750	200	225	9
G475	1	NPT	7	1,750	100	225	17
GG475	1	NPT	10	1,750	100	225	17
H475	1.5	NPT	15	1,750	100	225	24
HJ475	1.5	NPT	20	1,750	100	225	24
HL475	1.5	NPT	30	1,750	100	225	26

**CONTACT THE VIKING PUMP
OIL & LACT PUMP SPECIALISTS:**

Ben Leonard: BLeonard@idexcorp.com
(618) 416-5830 Office | (618) 340-3062 Mobile

Doug Carlisle: DCarlisle@idexcorp.com
(720) 920-9627 Office | (303) 475-6997 Mobile